


ITEM NO.	PART NUMBER	SW-Configuration Name (Configuration Name)	DESCRIPTION	QTY.
1	15022-91	Default	Weldment	1
2	15022-01	LeftHand	Kaw. Ridge Domestic Bumper Mount	1
3	15022-01	RightHand	Kaw. Ridge Domestic Bumper Mount	1
4	M6-1 Rivet Nut	M6-1 Rivet Nut	Heavy Duty Twist-Resistant Rivet Nut	4
5	M6-1x 20mm	M6-1x 20mm	Class 8.8 Steel Flanged Hex Head Screw	4
6	.5 Flat Washer	.5 Flat Washer	Zinc-Plated Steel SAE Washer	4
7	.5-13 x 4	.5-13 x 4	Medium-Strength Grade 5 Steel Hex Head Screw	2
8	.375-16 x 1	.375-16 x 1	Grade 5 Steel Square-Neck Carriage Bolt	4
9	.375-16 Nylock Nut	.375-16 Nylock Nut	High-Strength Steel Nylon-Insert Locknut	4
10	.5-13 Nylock Nut	.5-13 Nylock Nut	High-Strength Steel Nylon-Insert Locknut	2
11	.375 Flat Washer	.375 Flat Washer	Zinc-Plated Steel SAE Washer	16

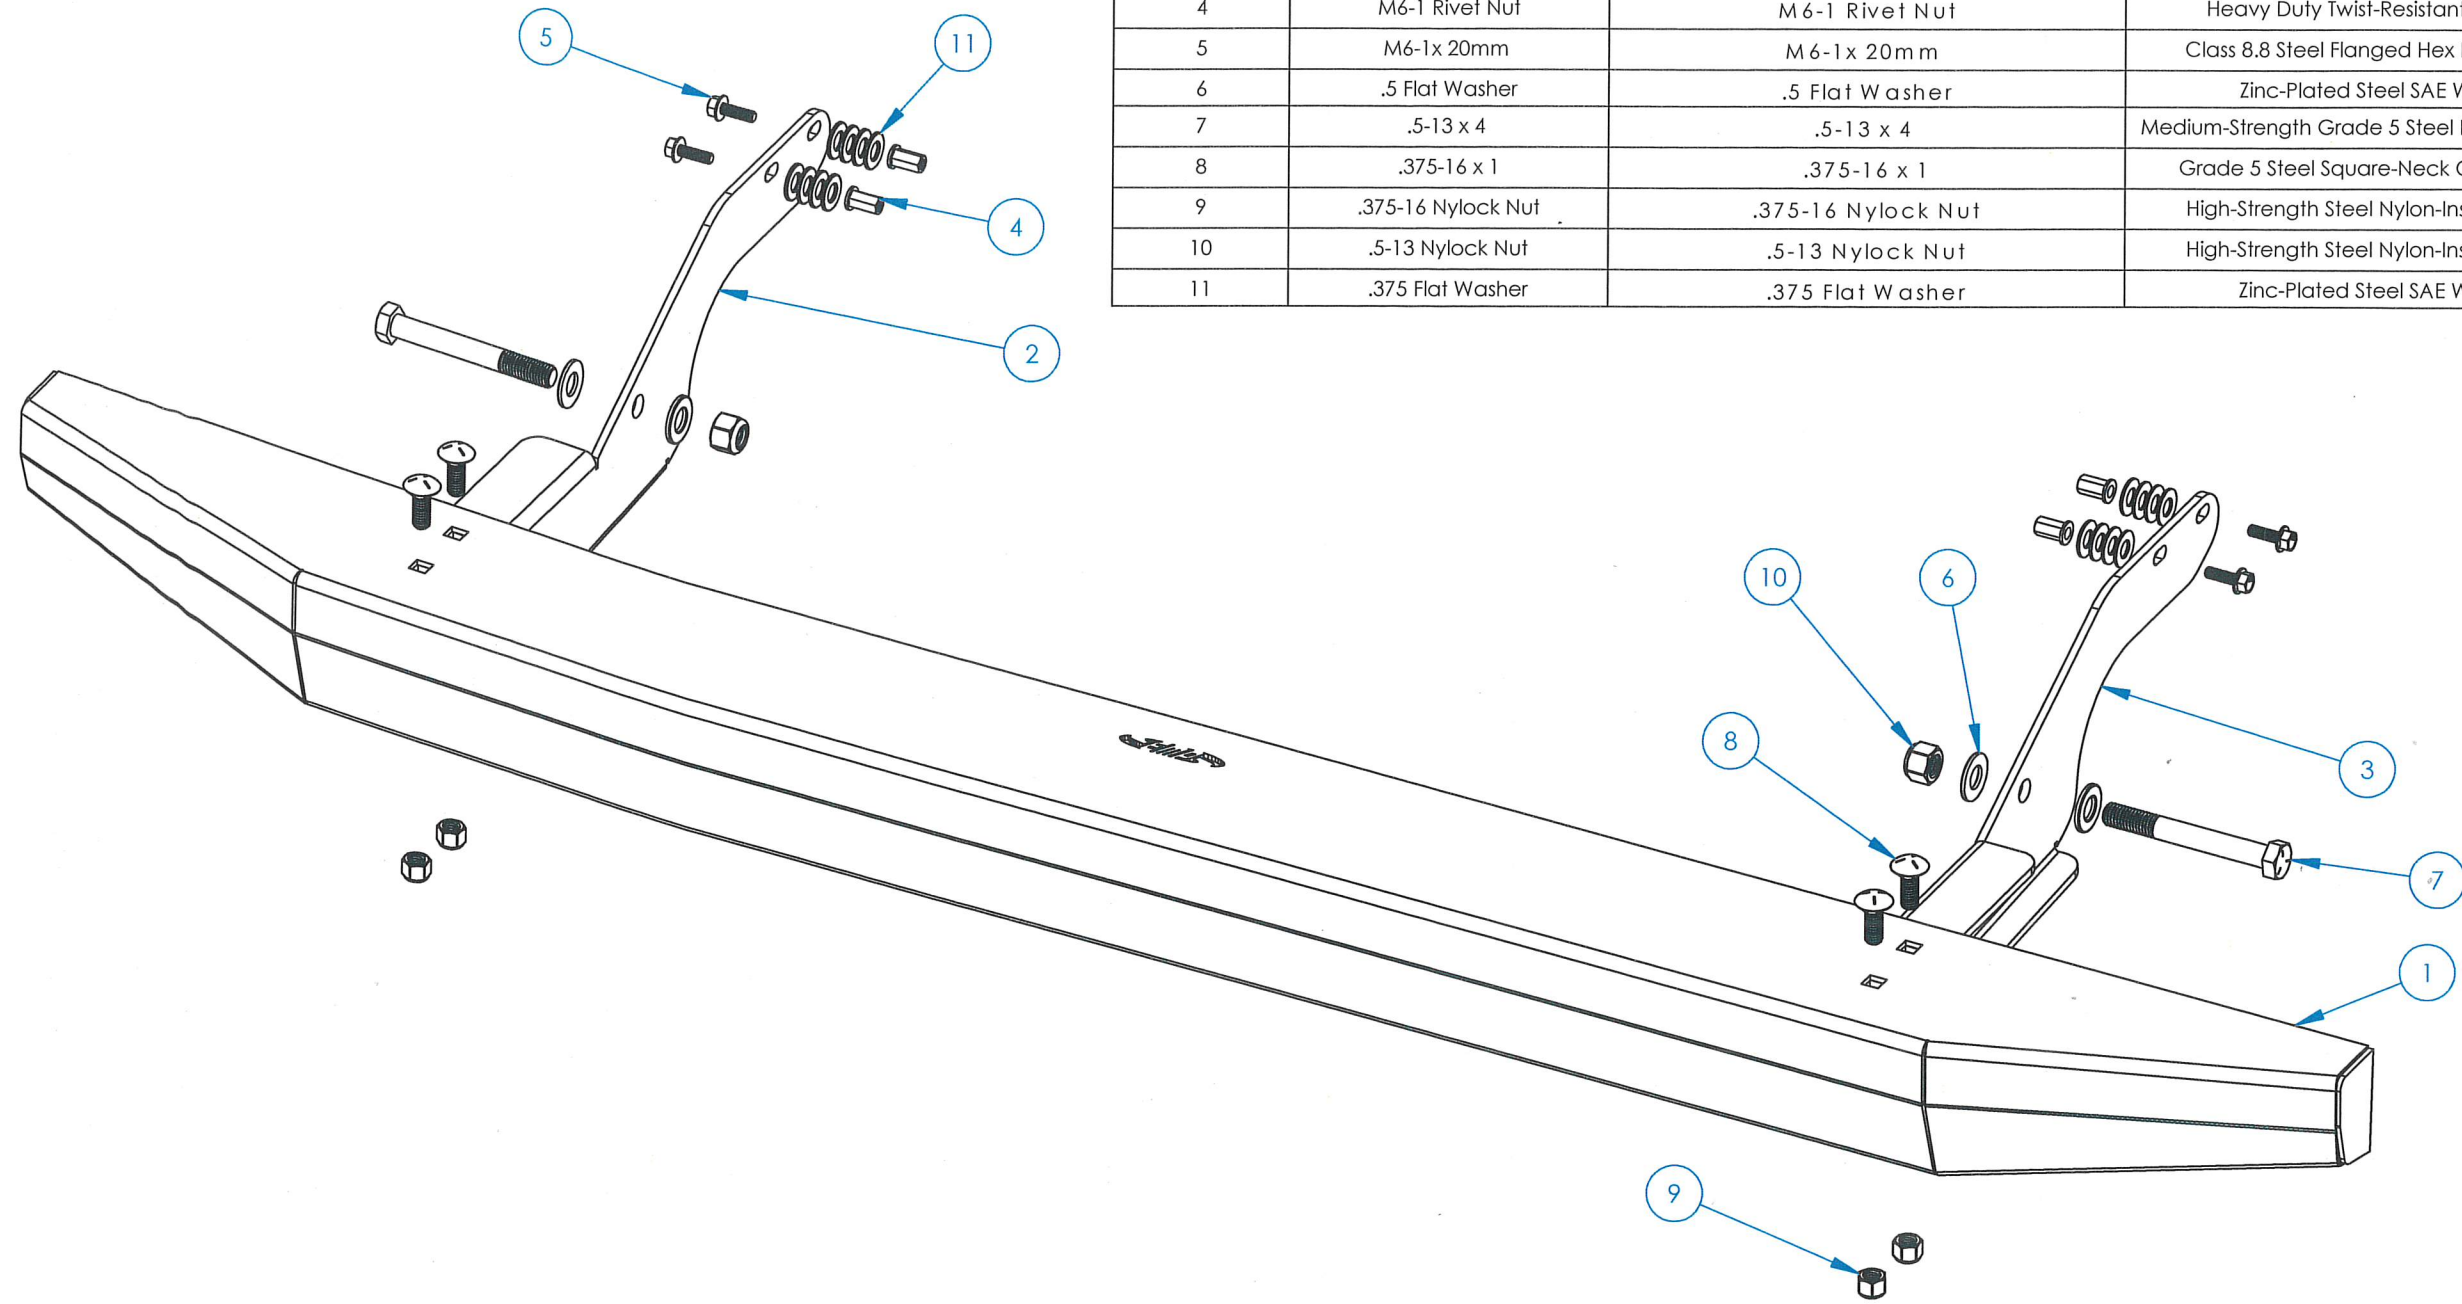


Notes:  
1.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Extreme Metal Products, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Extreme Metal Products, LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Extreme Metal Products, LLC 4730 Briar Rd. Cleveland Oh. 44135
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/16 ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.03 THREE PLACE DECIMAL ±.005		DRAWN	CLF	
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		TITLE: Domestic Kaw. Ridge Bumper
MATERIAL		ENG APPR.		SIZE DWG. NO. REV <b>B</b> 15022-90
FINISH		MFG APPR.		SCALE: 1:4 WEIGHT: 24.2 SHEET 1 OF 1
NEXT ASSY	USED ON	Q.A.		
APPLICATION	DO NOT SCALE DRAWING	COMMENTS:		

ITEM NO.	PART NUMBER	SW-Configuration Name (Configuration Name)	DESCRIPTION	QTY.
1	15022-91	Default	Weldment	1
2	15022-01	LeftHand	Kaw. Ridge Domestic Bumper Mount	1
3	15022-01	RightHand	Kaw. Ridge Domestic Bumper Mount	1
4	M6-1 Rivet Nut	M6-1 Rivet Nut	Heavy Duty Twist-Resistant Rivet Nut	4
5	M6-1x 20mm	M6-1x 20mm	Class 8.8 Steel Flanged Hex Head Screw	4
6	.5 Flat Washer	.5 Flat Washer	Zinc-Plated Steel SAE Washer	4
7	.5-13 x 4	.5-13 x 4	Medium-Strength Grade 5 Steel Hex Head Screw	2
8	.375-16 x 1	.375-16 x 1	Grade 5 Steel Square-Neck Carriage Bolt	4
9	.375-16 Nylock Nut	.375-16 Nylock Nut	High-Strength Steel Nylon-Insert Locknut	4
10	.5-13 Nylock Nut	.5-13 Nylock Nut	High-Strength Steel Nylon-Insert Locknut	2
11	.375 Flat Washer	.375 Flat Washer	Zinc-Plated Steel SAE Washer	16

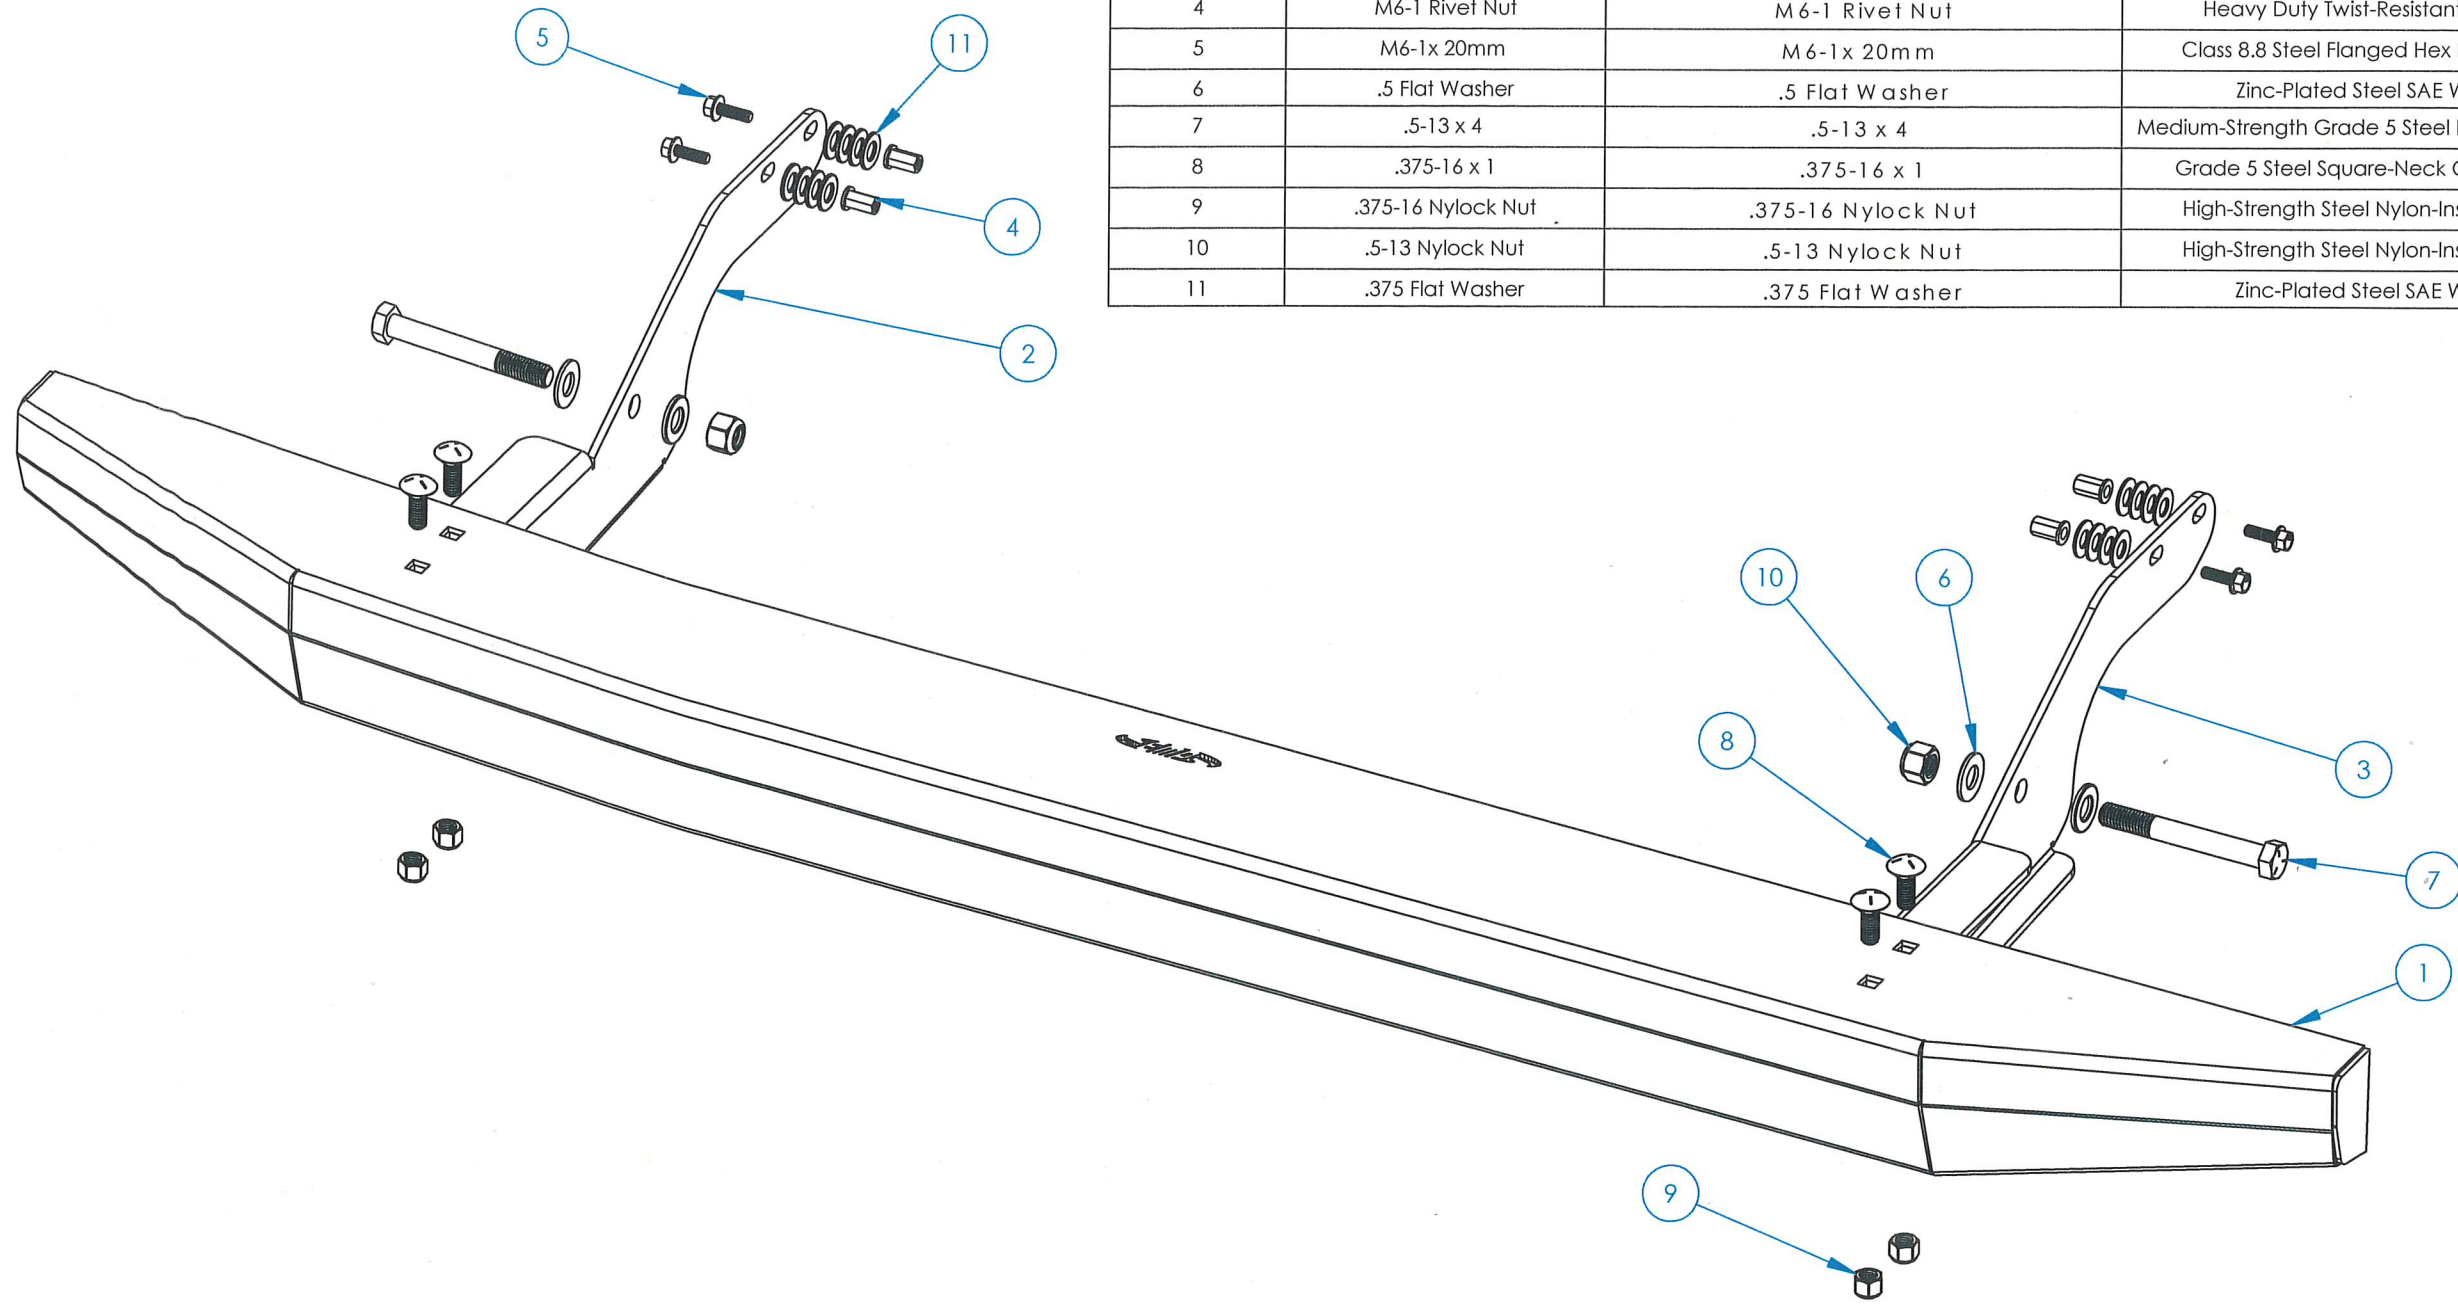

Notes:  
1.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Extreme Metal Products, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Extreme Metal Products, LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	Extreme Metal Products, LLC 4730 Briar Rd. Cleveland Oh. 44135
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm$ BEND $\pm$ TWO PLACE DECIMAL $\pm .03$ THREE PLACE DECIMAL $\pm .005$		DRAWN	CLF	
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		TITLE: Domestic Kaw. Ridge Bumper
MATERIAL		ENG APPR.		SIZE DWG. NO. REV <b>B</b> 15022-90
FINISH		MFG APPR.		SCALE: 1:4 WEIGHT: 24.2 SHEET 1 OF 1
NEXT ASSY	USED ON	Q.A.		
APPLICATION	DO NOT SCALE DRAWING	COMMENTS:		